

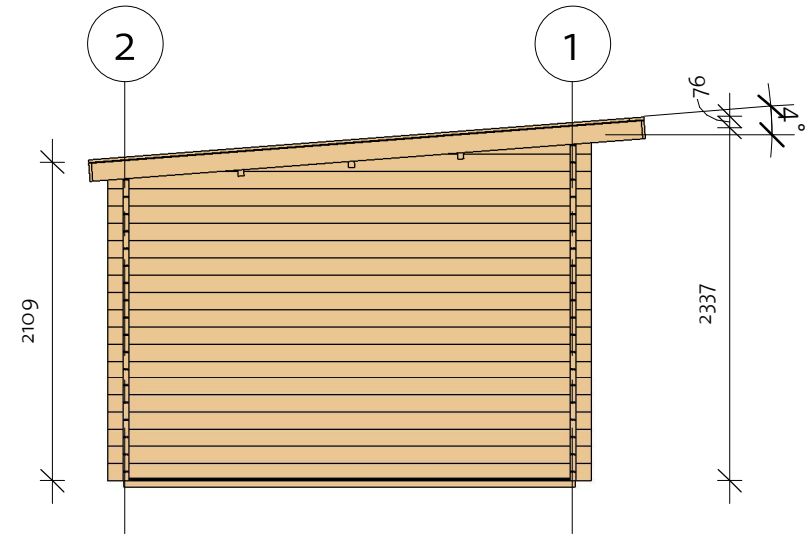


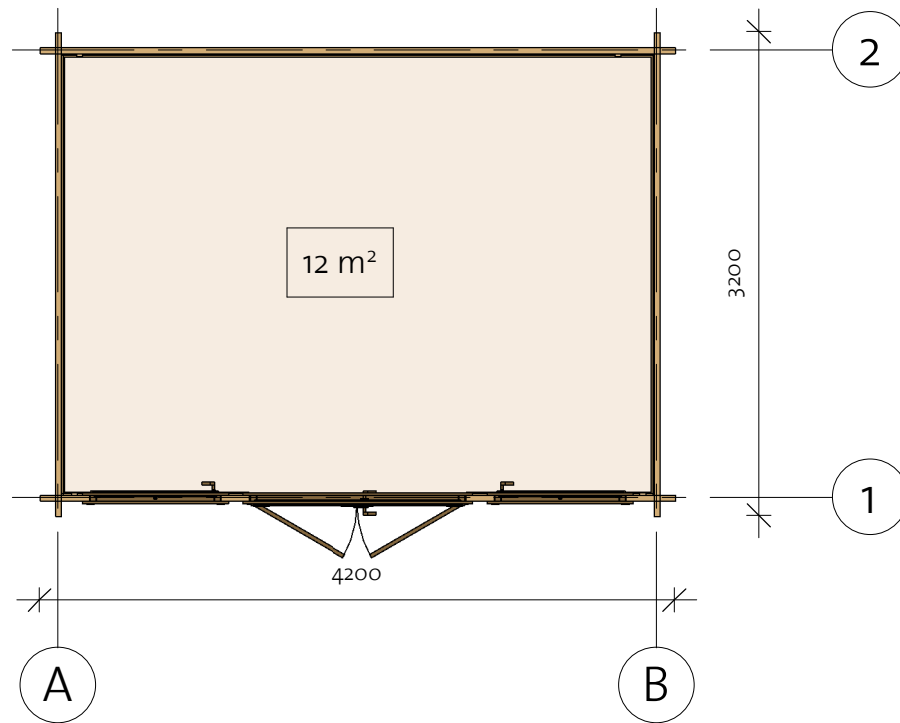

Cleo 40 (400x300)

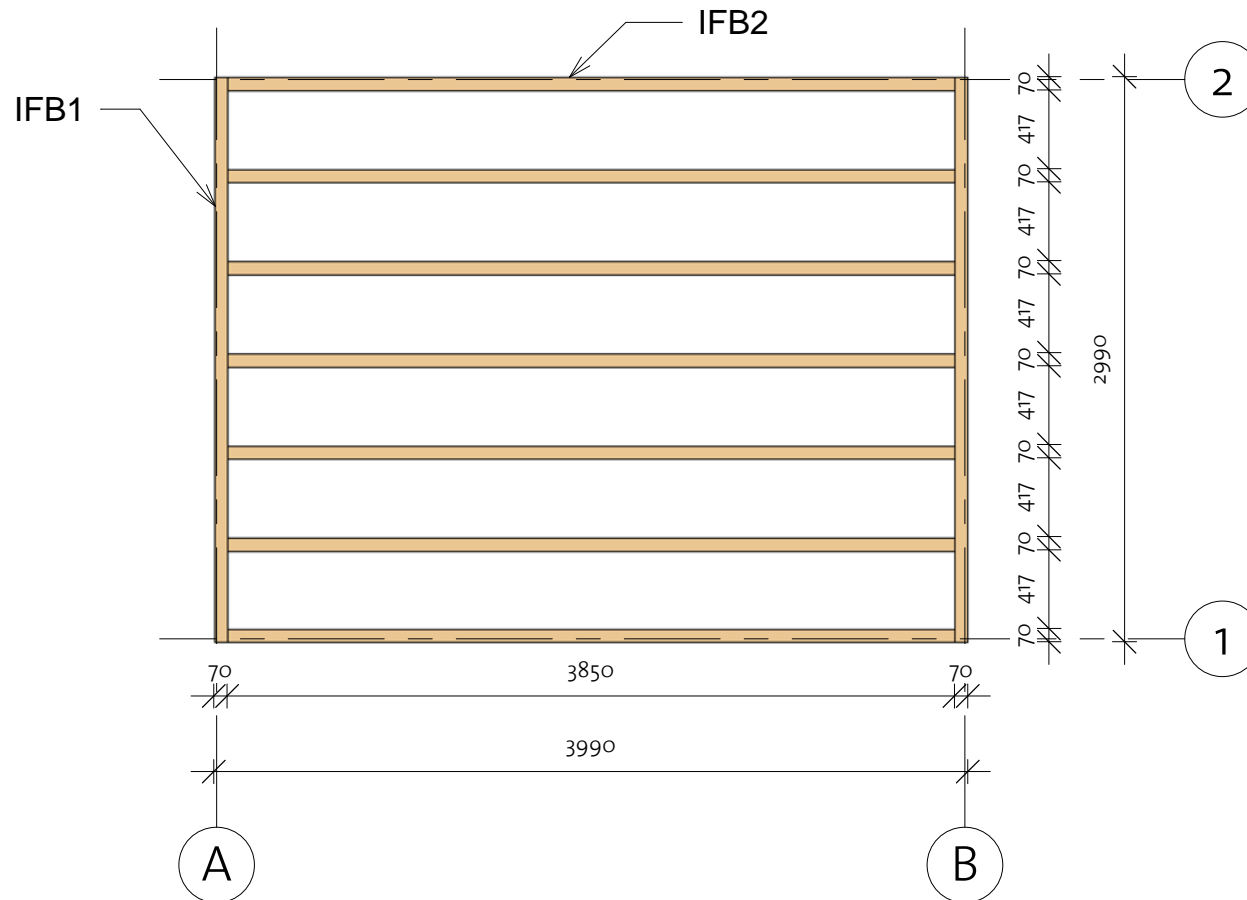

Cleo 40 (400x300)

Foundation






Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2990
IFB2	IFB 70x40		7	3850


Cleo 40 (400x300)

Floor Plan

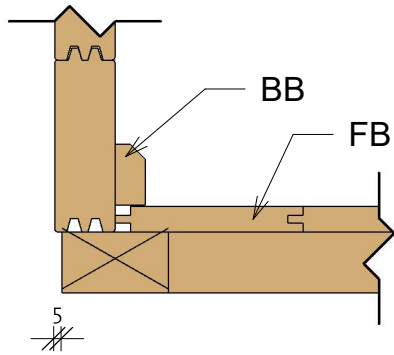① Baseboard




Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		36	2918
BB	BB 20x40		2	4000
BB	BB 20x40		2	3000

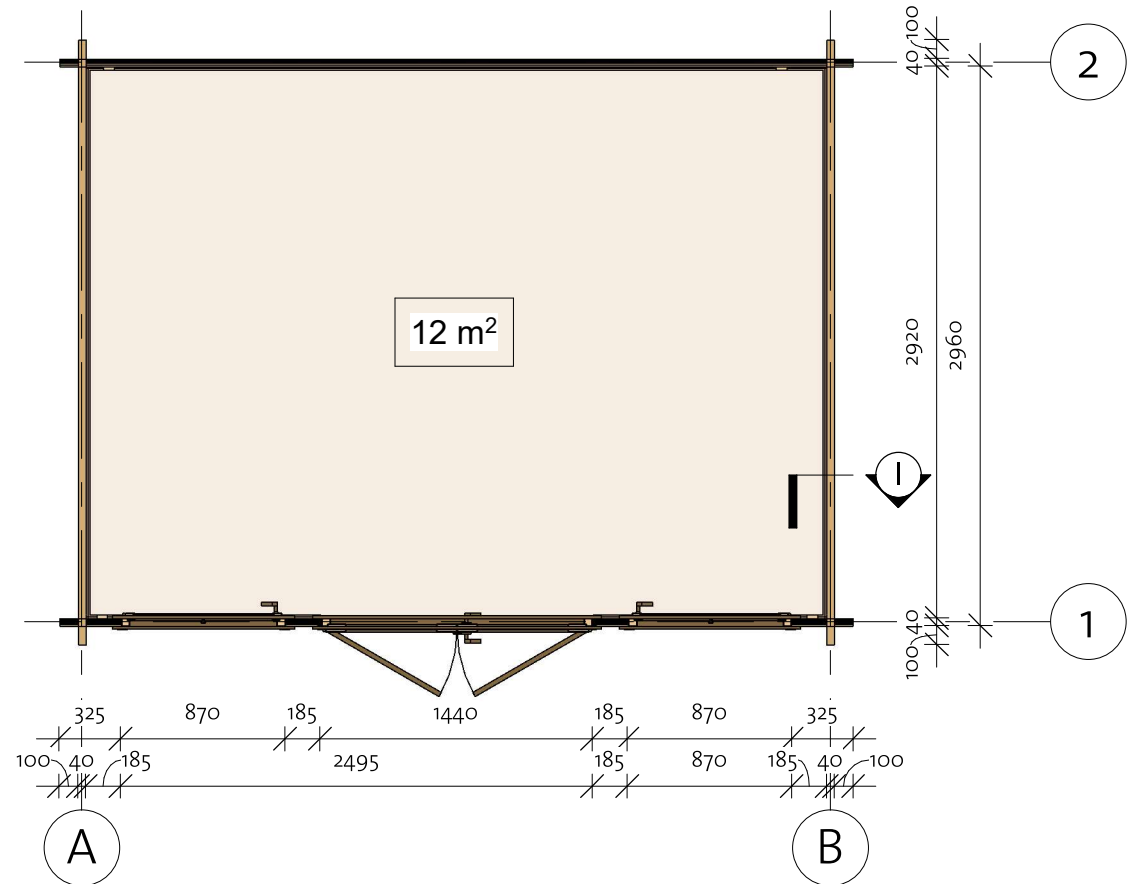

91923053_200318


Cleo 40 (400x300)

Wall 1

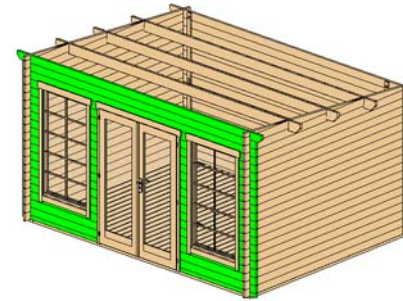

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	1380
1LG-1	40x114	28	185
1LG-2	40x114	28	325
1LG-3	40x114	6	1380
1LG-4	40x114	2	4200
1TL-1	40x114	1	4400

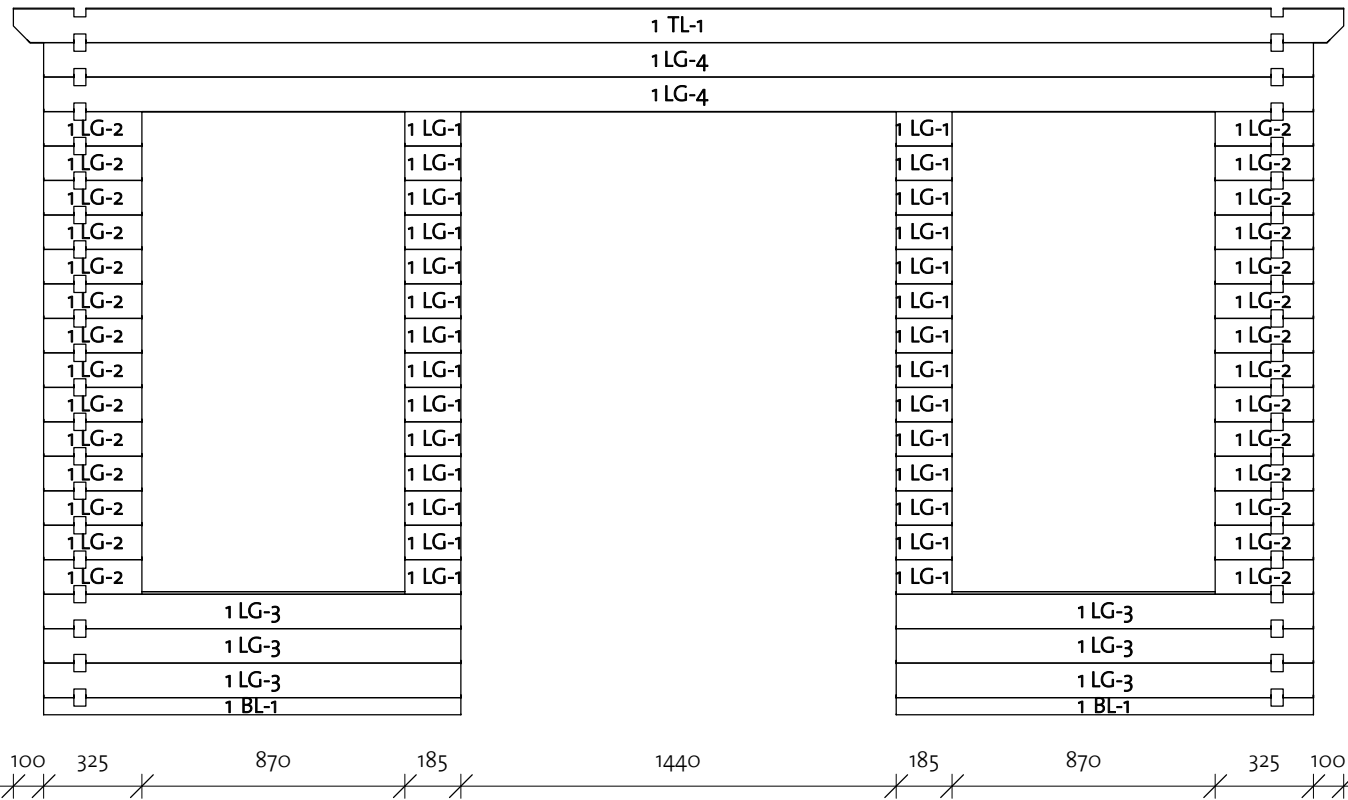


Log Profile Wall 1	
Profile	Profile

40x57	
40x114	
40x114	


Cleo 40 (400x300)

Wall 2

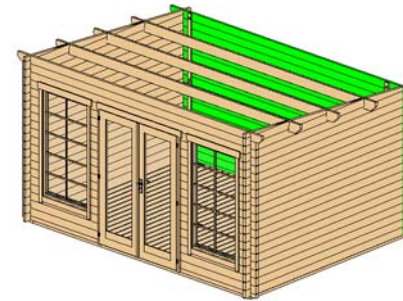

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	4200
2LG-1	40X114	17	4200
2TL-1	40X114	1	4400

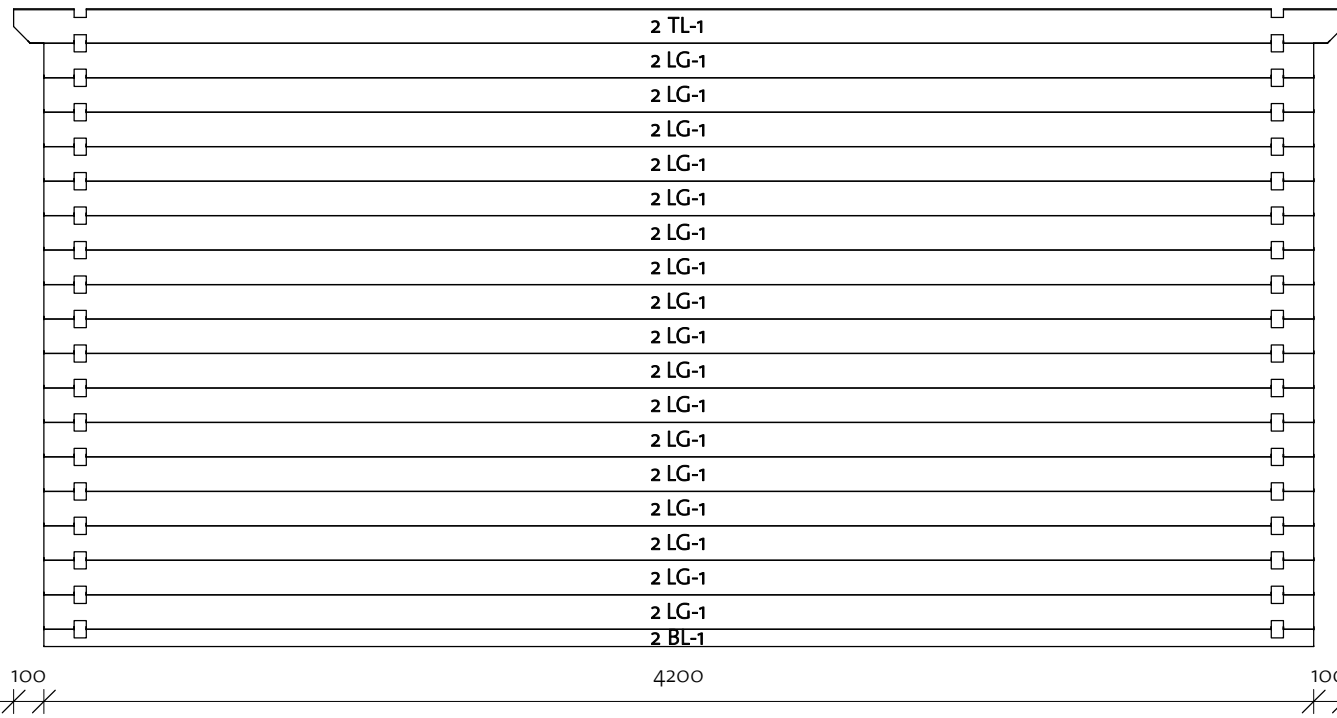


Log Profile Wall 2	
Profile	Profile

40X57	
40X114	
40X114	


Cleo 40 (400x300)

Wall A

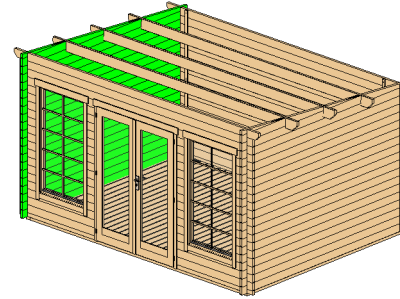

Wall A			
Mark	Profile	Count	Cut Length

ALG-1*	40x114	1	841
ALG-2*	40x114	1	2310
ALG-3	40x114	18	3200
ALG-4*	40x114	1	3200

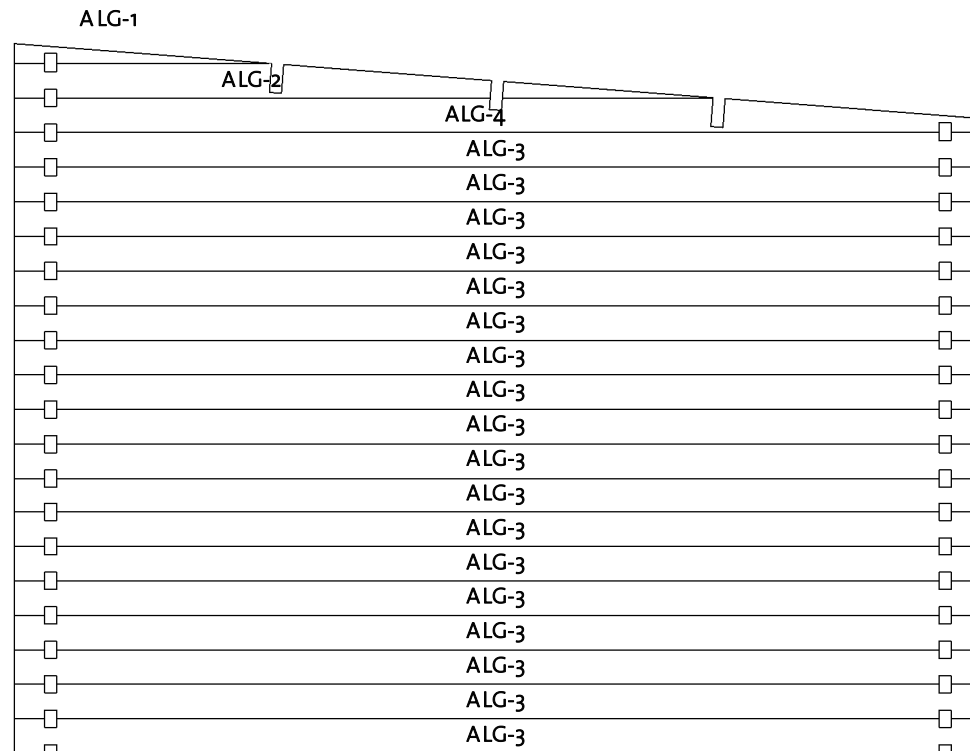


* Gable - delivered premounted

Log Profile Wall A	
Profile	Profile

40x114	
--------	--


Cleo 40 (400x300)

Wall B

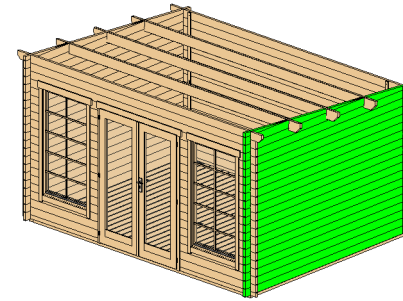


Wall B			
Mark	Profile	Count	Cut Length

BLG-1*	40X114	1	841
BLG-2*	40X114	1	2310
BLG-3	40X114	18	3200
BLG-4*	40X114	1	3200

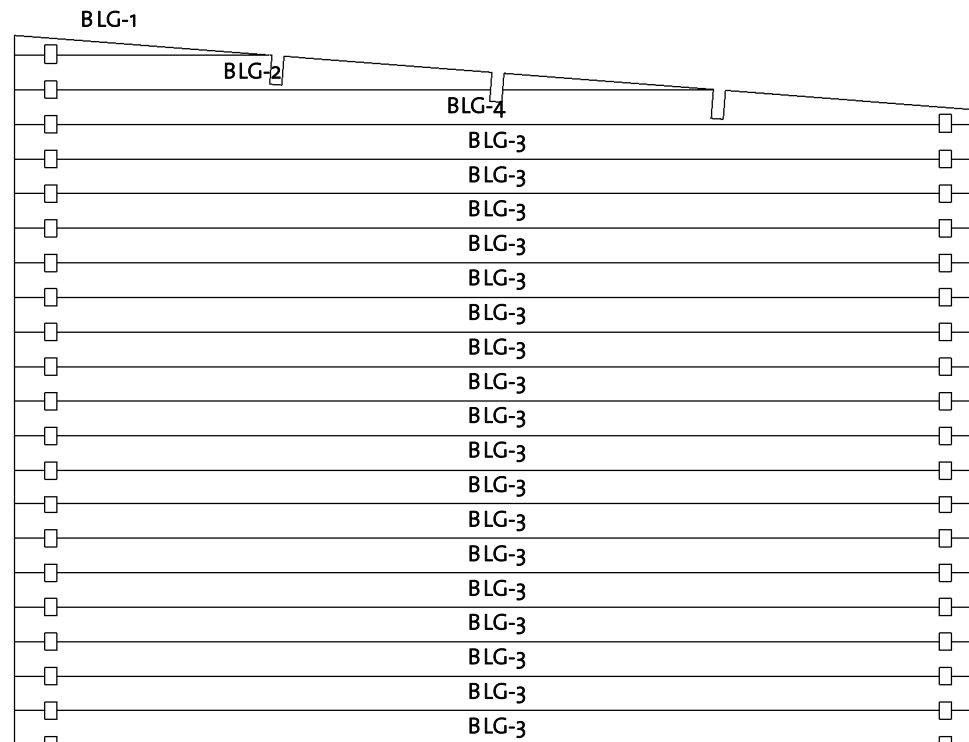


* Gable - delivered premounted



Log Profile Wall B	
Profile	Profile

40X114	
--------	---

Cleo 40 (400x300)

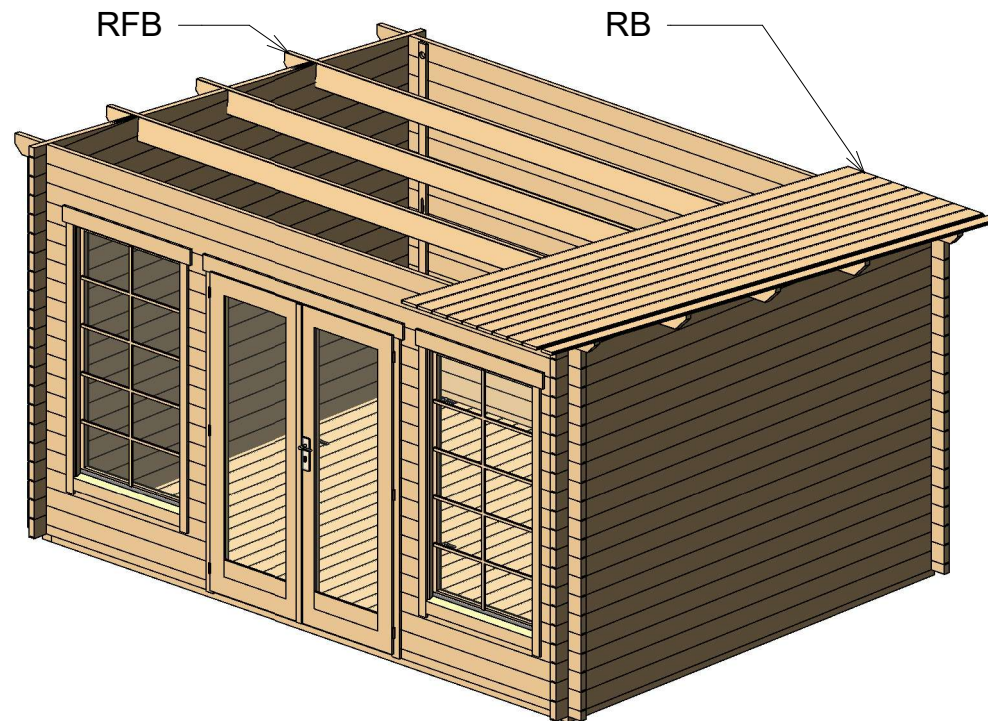
Roof 1





Roof				
Mark	Type	Profile	Count	Length
RFB	Beam 40x143		3	4400
RB	17x114		40	3650

Cleo 40 (400x300)


Roof 2

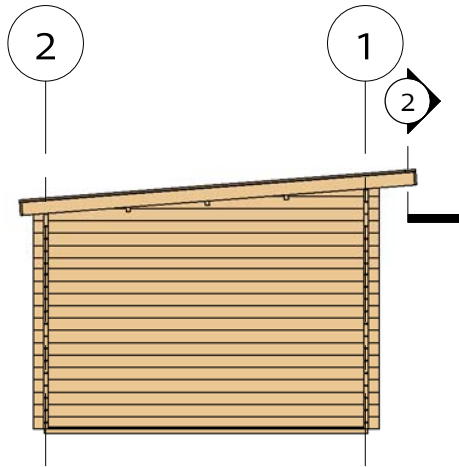

② Facia

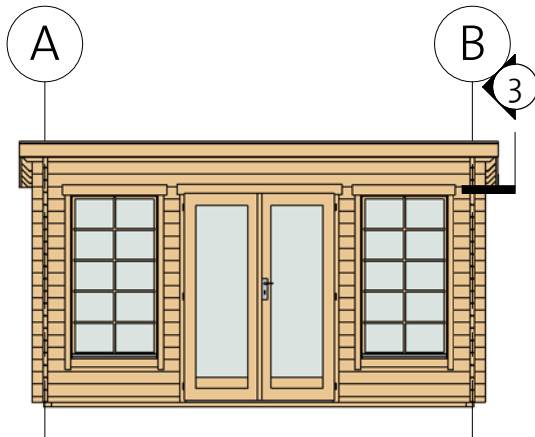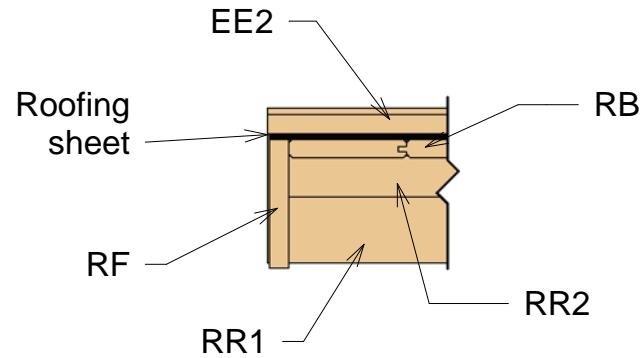

③ Roof Reinforcement

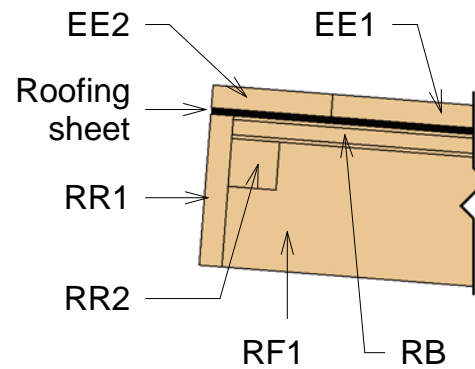


Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x95		2	3590
EE2	Eave Edging 18x95		1	4440
RF	Roof Fascia 18x120		2	3650
RR1	Roof reinforcement 18x120		2	4440
RR2	Roof reinforcement 38x38		2	4400


Cleo 40 (400x300)

Extras

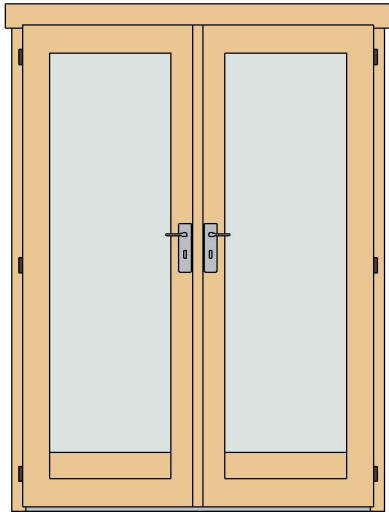

Door Schedule				
Mark	Type	Width	Height	Count

CDD3R	Classic double door 3, full glass right	1425	1955	1
-------	---	------	------	---

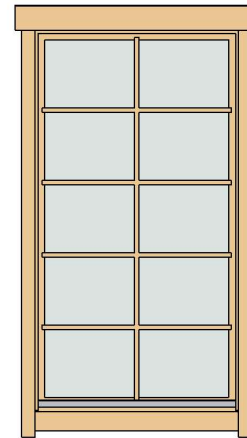

Window Schedule				
Mark	Type	Width	Height	Count

CW10L	Classic window 10 left	865	1555	1
CW10R	Classic window 10 right	865	1555	1

WCB10	Windows Crossbar 10	--	--	2
-------	---------------------	----	----	---

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8 x 70	12
Screws	5,0 x 70	15
Nails	1,4 x 40	40
Screws	6,0 x 140	50
Screws	4,0 x 40	85
Screws	4,0 x 50	500

Family	Count	Length
--------	-------	--------

Windboard 18x40	4	2200
-----------------	---	------





91923053_200318



Cleo 40 (400x300)

List of all items 1



Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2990
IFB2	IFB 70x40		7	3850






Roof

Mark	Type	Profile	Count	Length
RFB	Beam 40x143		3	4400
RB	17x114		40	3650

Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		36	2918
BB	BB 20x40		2	4000
BB	BB 20x40		2	3000

Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x95		2	3590
EE2	Eave Edging 18x95		1	4440
RF	Roof Fascia 18x120		2	3650
RR1	Roof reinforcement 18x120		2	4440
RR2	Roof reinforcement 38x38		2	4400

Cleo 40 (400x300)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	1380
1LG-1	40X114	28	185
1LG-2	40X114	28	325
1LG-3	40X114	6	1380
1LG-4	40X114	2	4200
1TL-1	40X114	1	4400

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	4200
2LG-1	40X114	17	4200
2TL-1	40X114	1	4400

Wall A			
Mark	Profile	Count	Cut Length



ALG-1*	40X114	1	841
ALG-2*	40X114	1	2310
ALG-3	40X114	18	3200
ALG-4*	40X114	1	3200

Wall B			
Mark	Profile	Count	Cut Length

BLG-1*	40X114	1	841
BLG-2*	40X114	1	2310
BLG-3	40X114	18	3200
BLG-4*	40X114	1	3200

* Gable - delivered premounted

Log Profiles	
Profile	Profile

40X57	
40X114	

Log Profiles	
Profile	Profile

40X114	
--------	---