

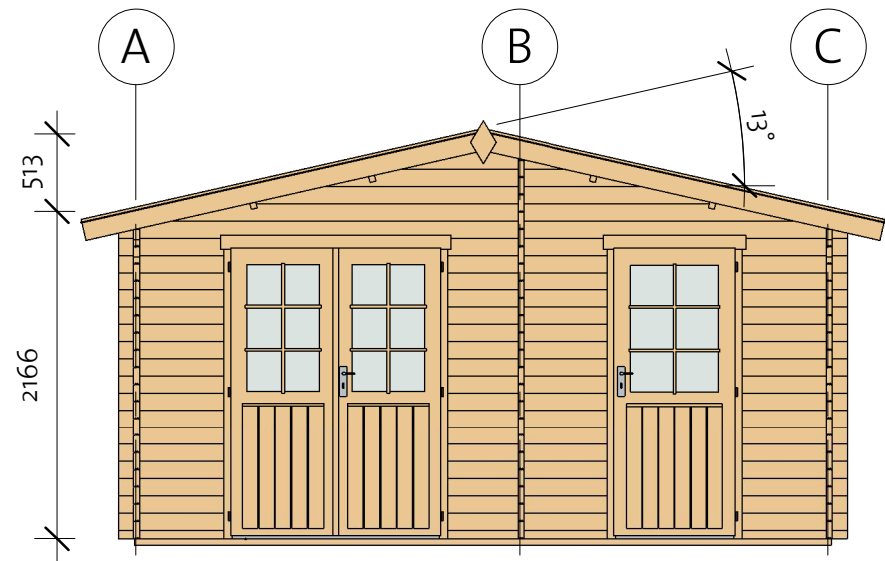


Laucher 40 (462x300)+VD

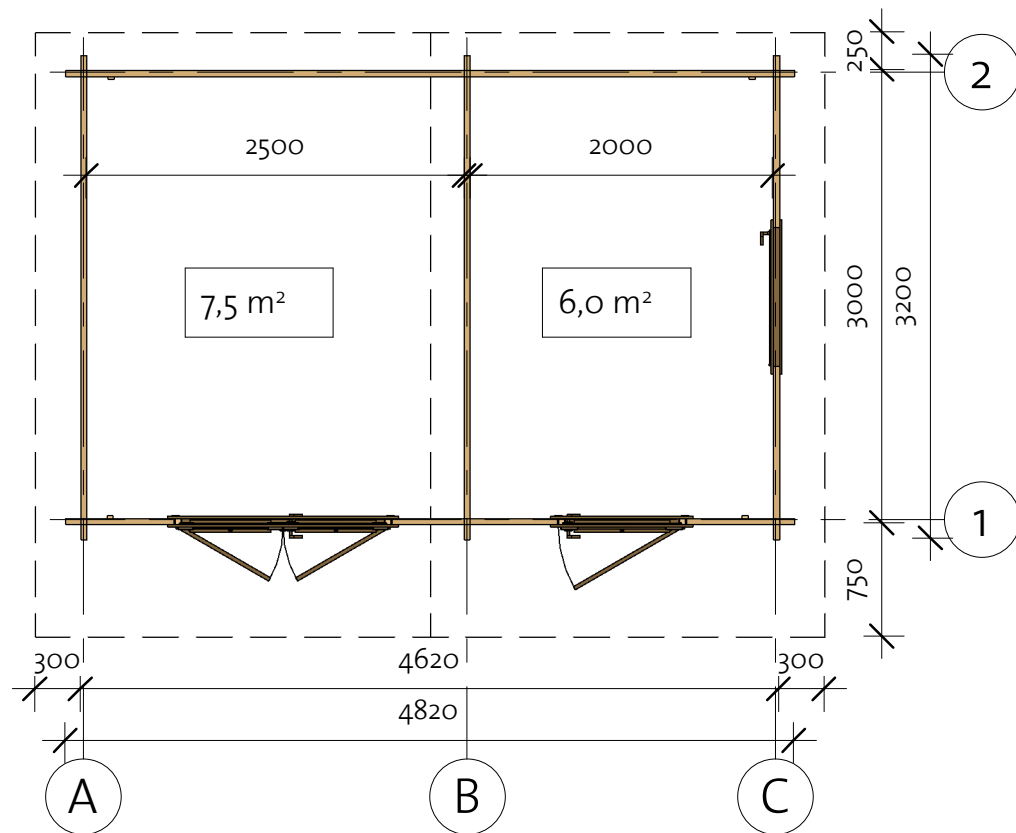


Laucher 40 (462x300)+VD

Foundation

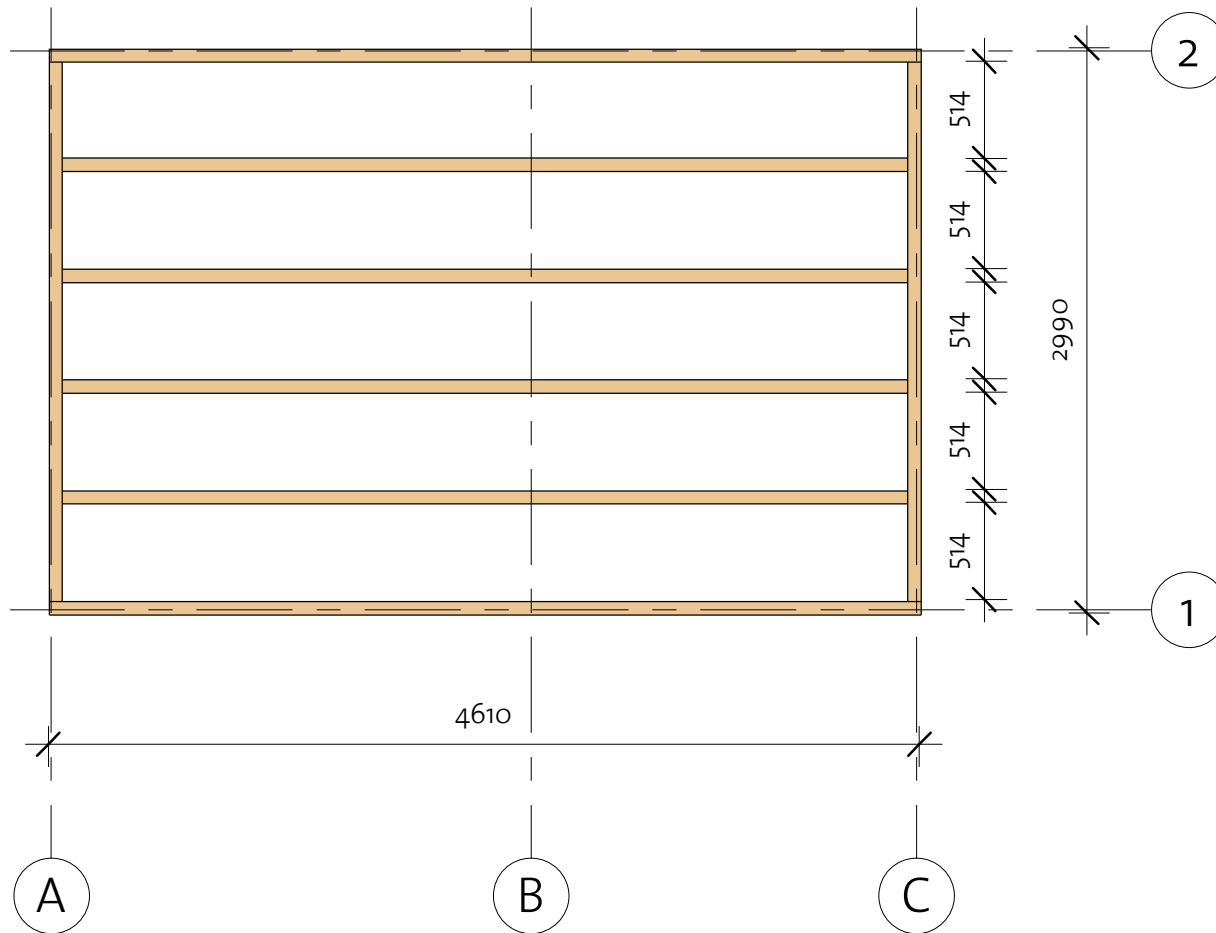


Impregnated foundation beams				
Mark	Type	Profile	Count	Length



IFB1	IFB 70x40		2	4610
IFB2	IFB 70x40		2	2850
IFB4	IFB 70x40		4	4470


Laucher 40 (462x300)+VD

Floor Plan

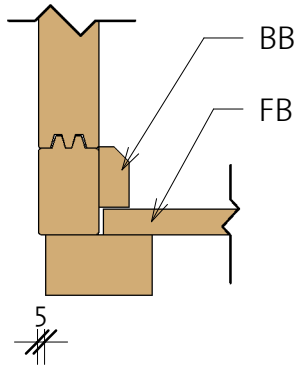① Baseboard





Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		40	2914
BB1	BB 20x40		2	4600
BB2	BB 20x40		4	3000

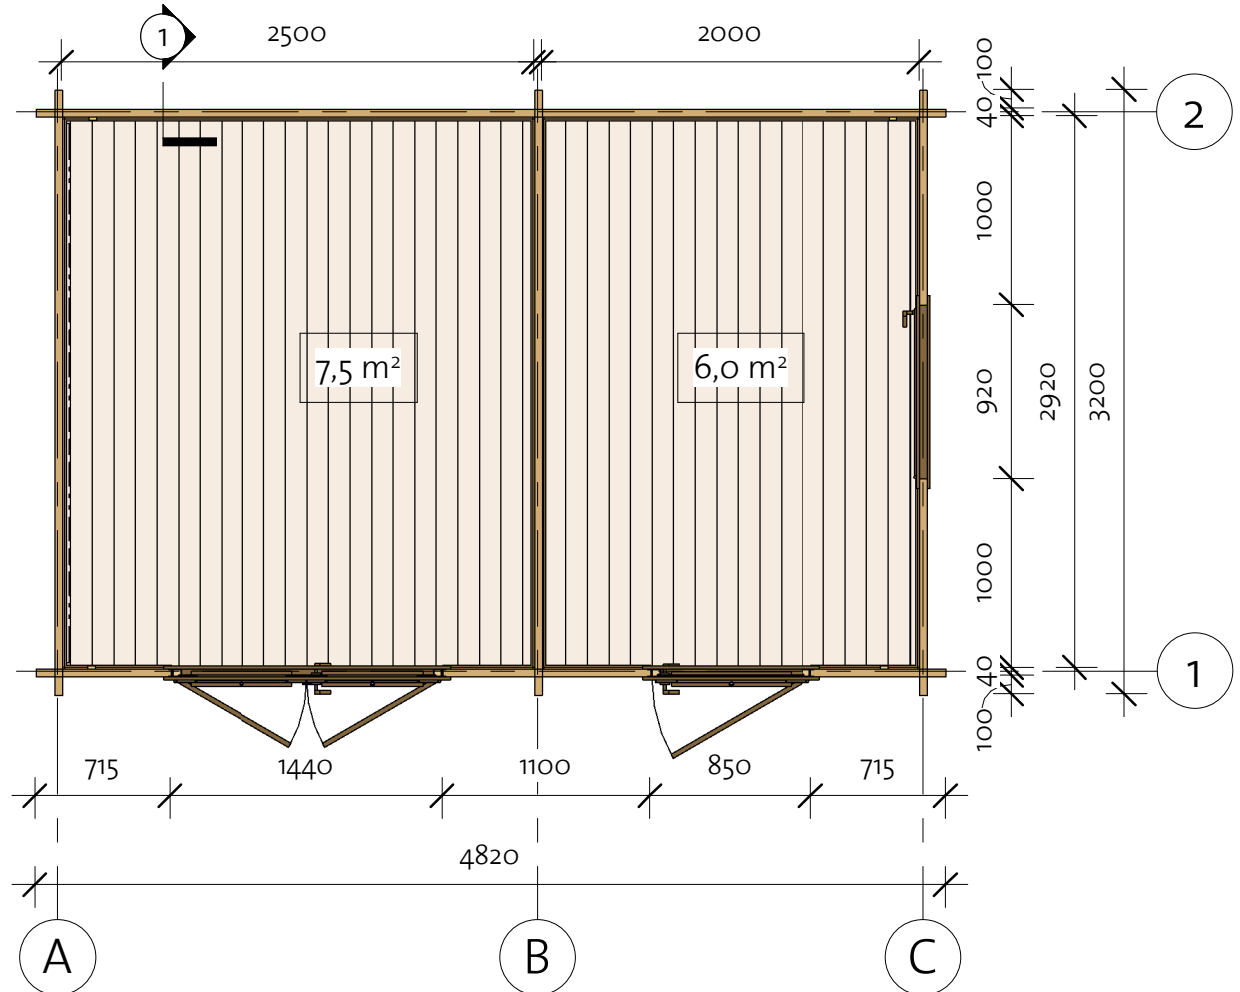

Laucher 40 (462x300)+VD

Wall 1

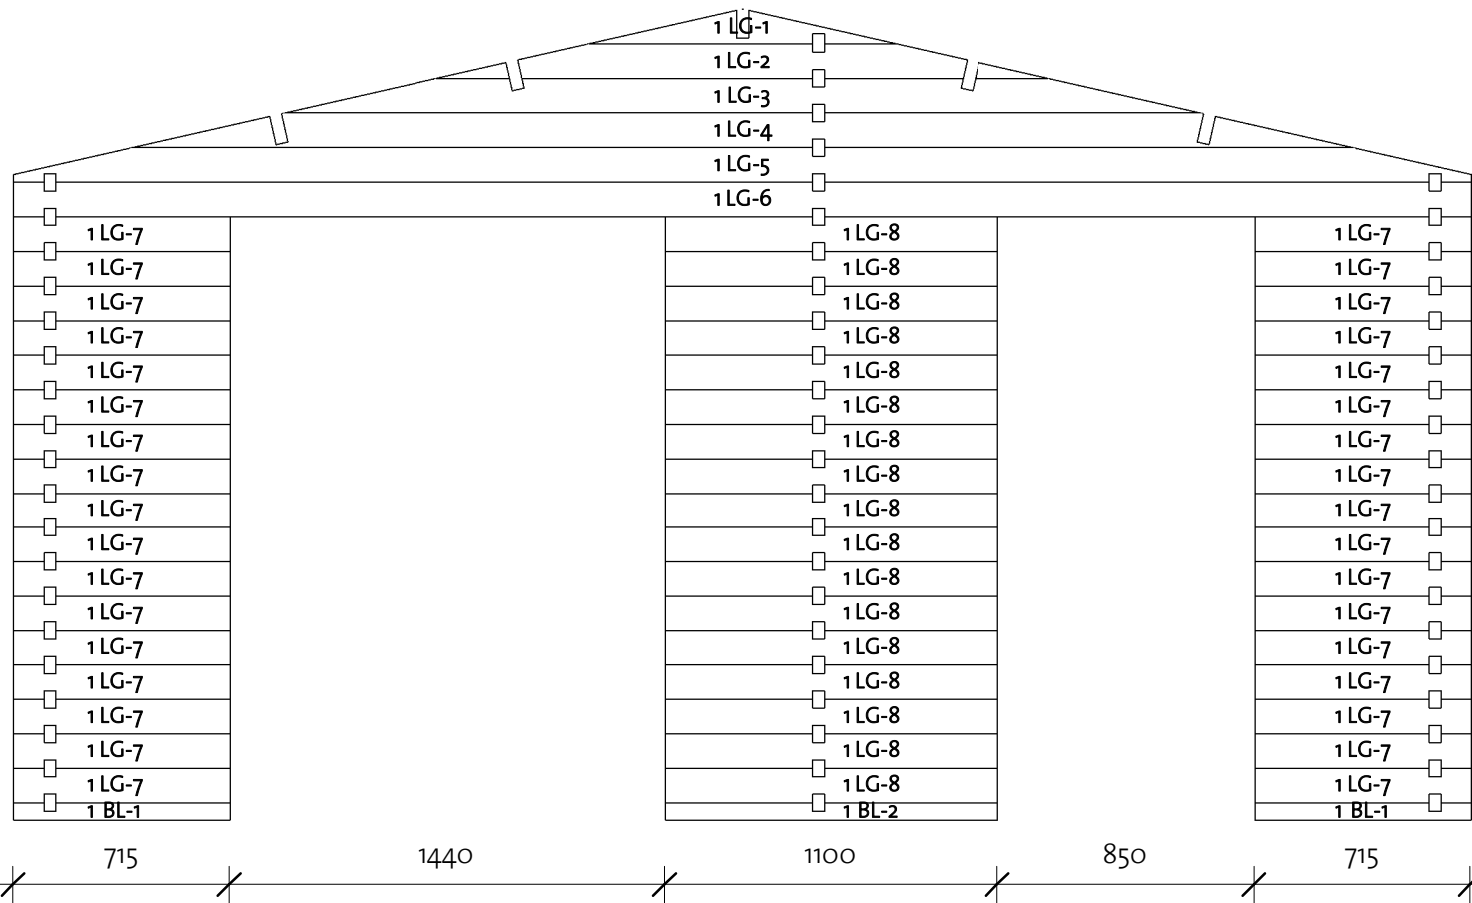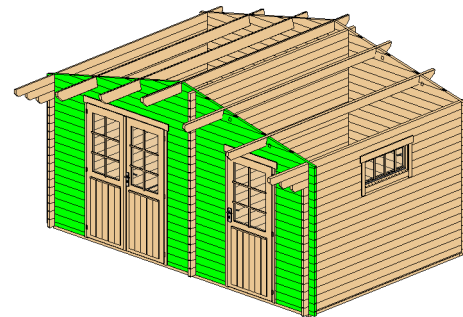



Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	715
1BL-2	40x57	1	1100
1LG-1 *	40x114	1	1013
1LG-2 *	40x114	1	2020
1LG-3 *	40x114	1	3028
1LG-4 *	40x114	1	4036
1LG-5 *	40x114	1	4820
1LG-6	40x114	1	4820
1LG-7	40x114	34	715
1LG-8	40x114	17	1100



* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40x57	
40x114	

Laucher 40 (462x300)+VD

Wall 2

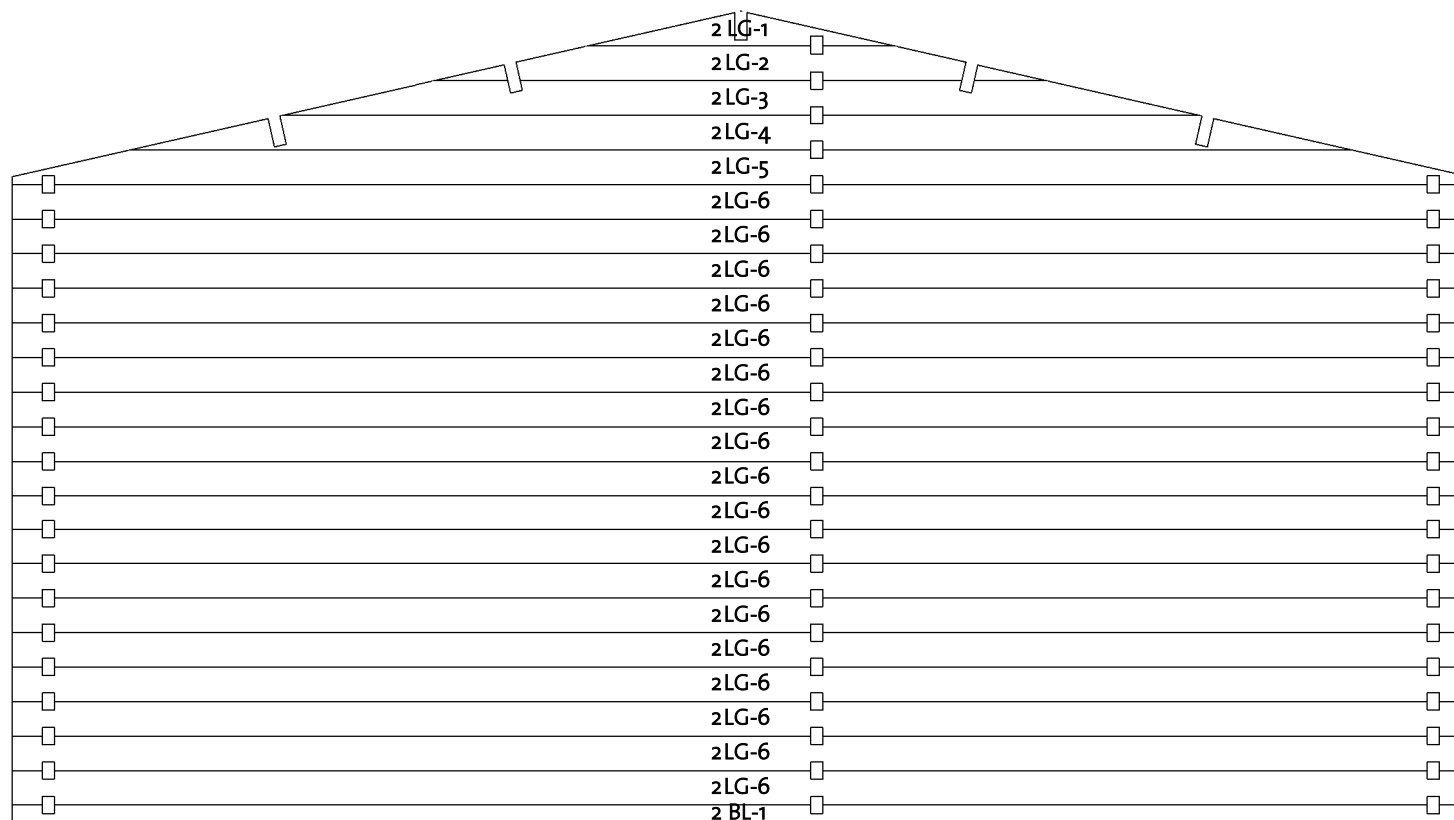
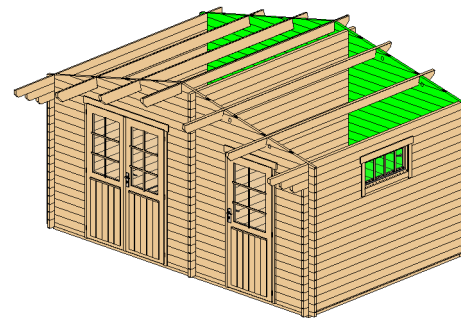


Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	4820
2LG-1*	40x114	1	1013
2LG-2*	40x114	1	2020
2LG-3*	40x114	1	3028
2LG-4*	40x114	1	4036
2LG-5*	40x114	1	4820
2LG-6	40x114	18	4820


* Gable - delivered premounted

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	


Laucher 40 (462x300)+VD

Wall A

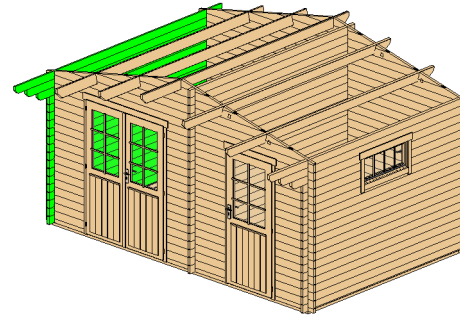

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	16	3200
ALG-2	40x114	1	3416
ALG-3	40x114	1	3633
ATL-1	40x114	1	4000

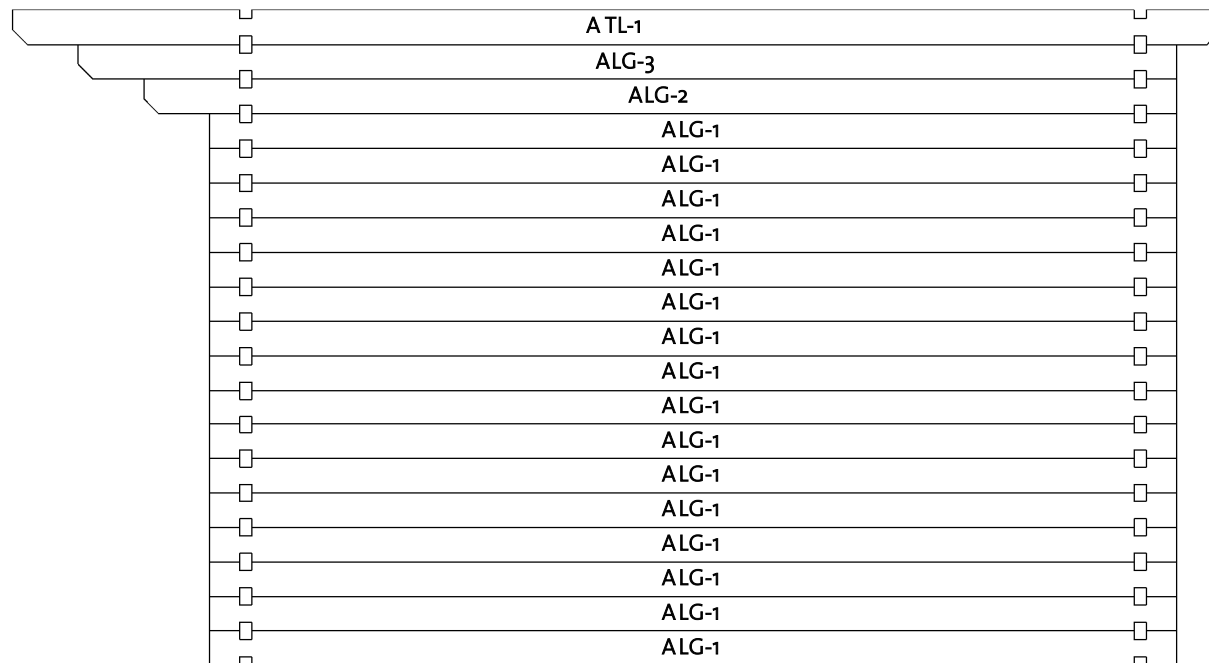


Log Profile Wall A	
Profile	Profile

40x114	
40x114	



Laucher 40 (462x300)+VD

Wall B

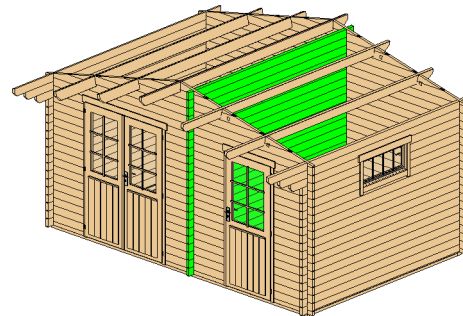

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	22	3200
BTL-1	40X120	1	3200

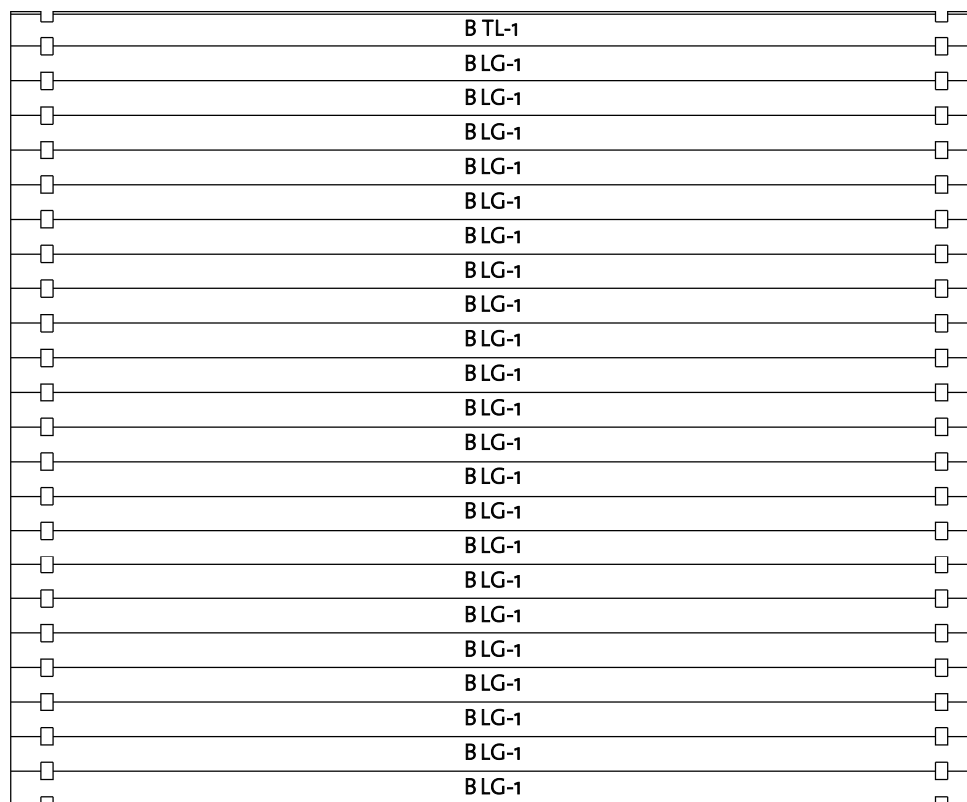


Log Profile Wall B	
Profile	Profile

40X120	
40X114	


Laucher 40 (462x300)+VD

Wall C

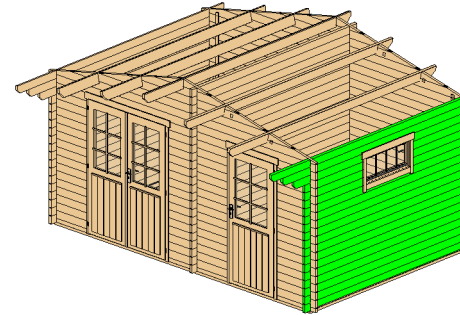

Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40x114	7	1140
CLG-2	40x114	1	1356
CLG-3	40x114	1	3633
CLG-4	40x114	13	3200
CTL-1	40x114	1	4000

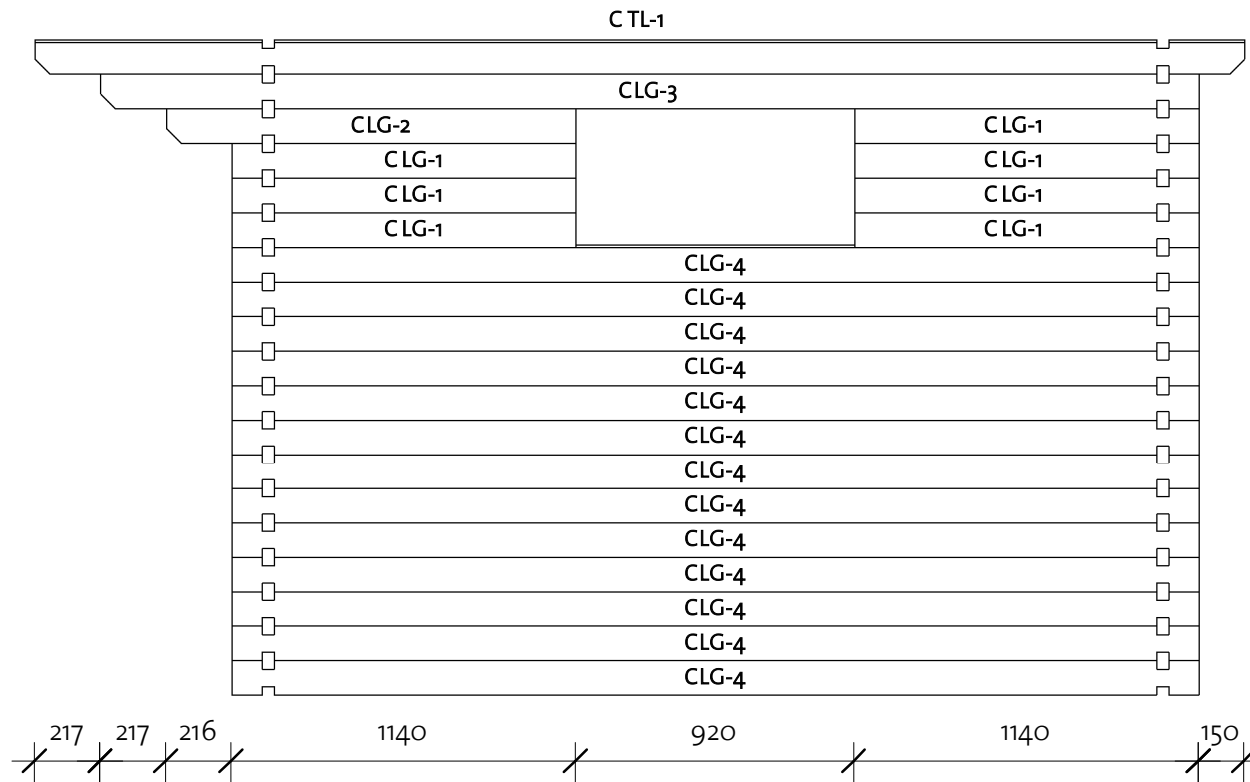





Log Profile Wall C	
Profile	Profile

40x114	
40x114	

Laucher 40 (462x300)+VD




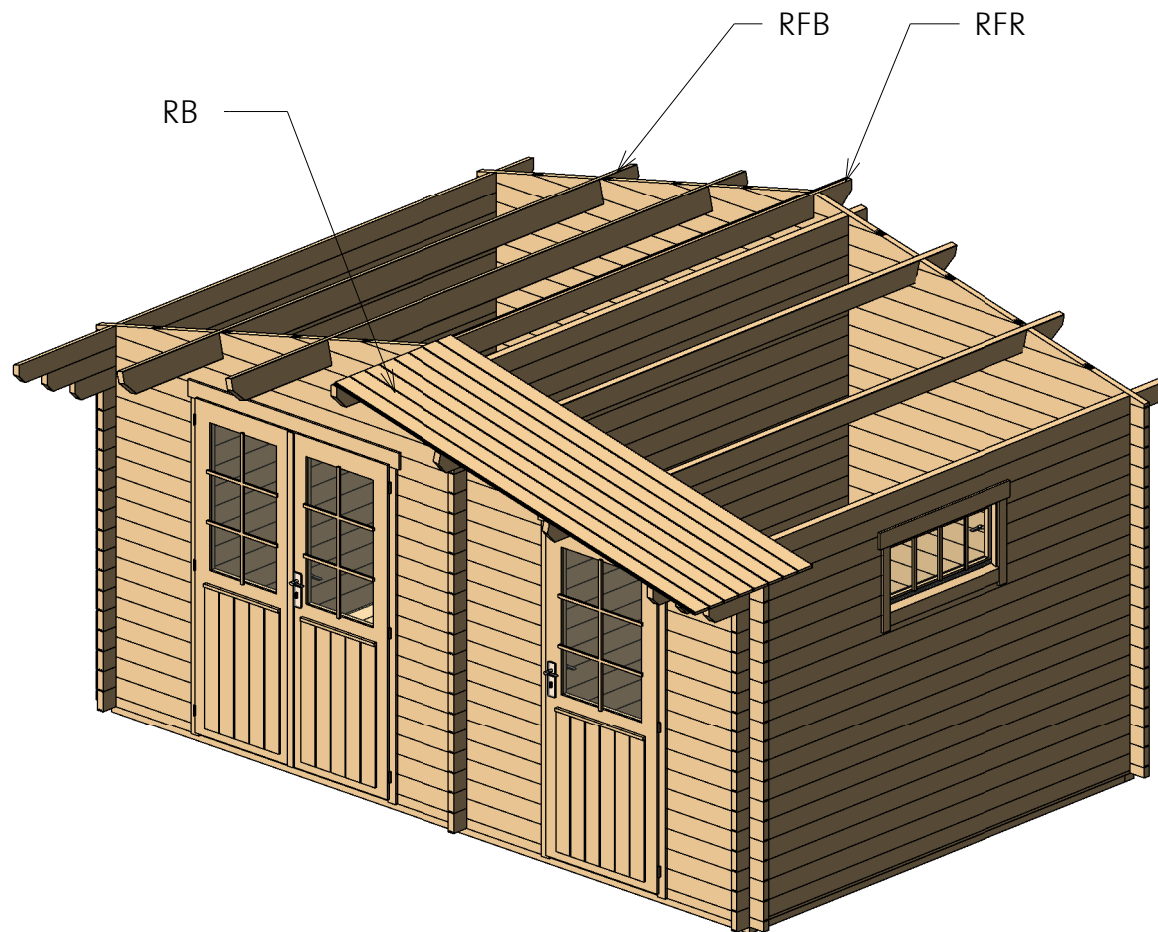
Roof 1



Roof				
Mark	Type	Profile	Count	Length
RB	17x114		72	2672
RFB	Beam 40x143		4	4000
RFR	Ridge 40x143		1	4000

Laucher 40 (462x300)+VD

Roof 2

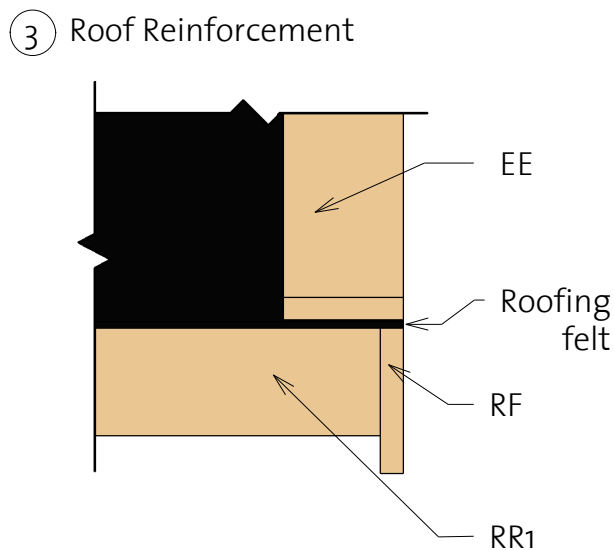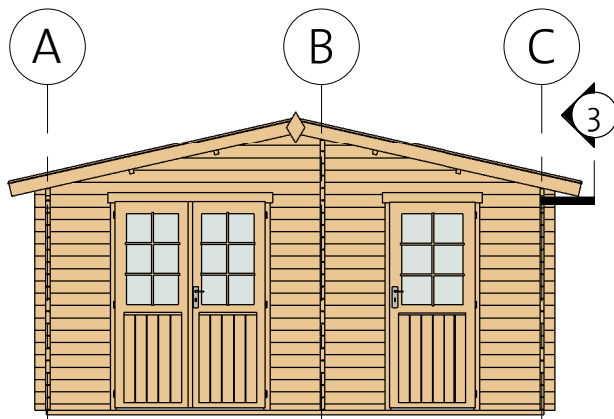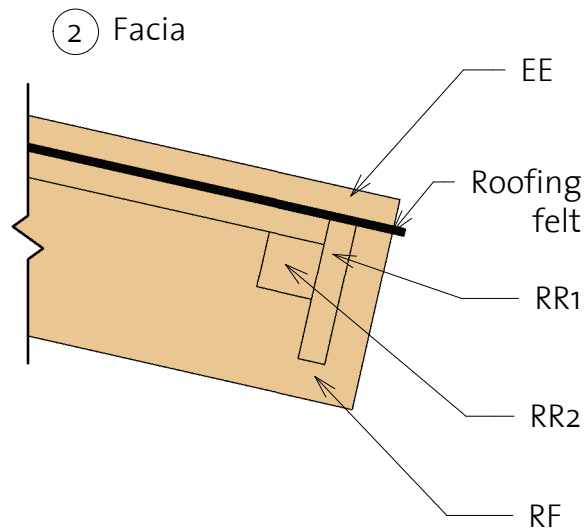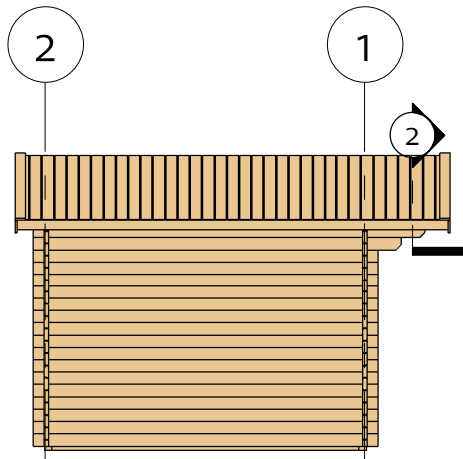


Fascia Schedule				
Mark	Type	Profile	Count	Length

EE	Eave Edging 18x95		4	2718
RF	Roof Fascia 18x120		4	2718
RR1	Roof reinforcement 18x95		2	4000
RR2	Roof reinforcement 38x38		2	4000

Laucher 40 (462x300)+VD

Extras

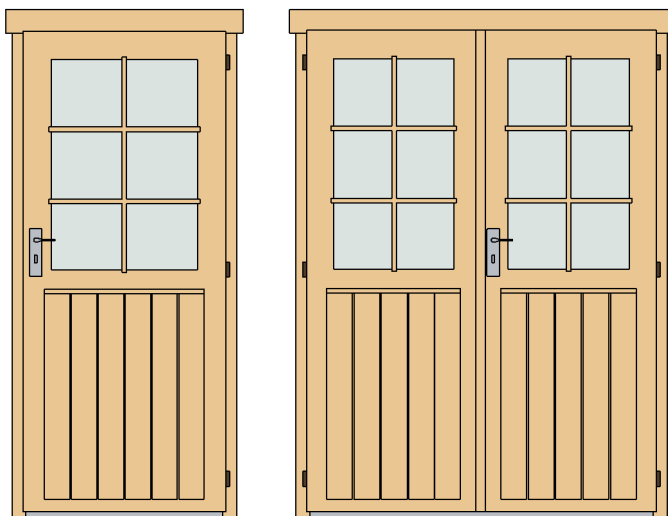


Door Schedule				
Model	Type	Width	Height	Count
CDD1R	Classic double door 1 right	1425	1955	1
CD4R	Classic door 4 right	840	1955	1
DCB6	Door Crossbar 6	--	--	3

Type	Count	Length
Windboard 18x40	4	2200
Type	Count	
Romb	2	

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8x70	12
Screws	5,0 x 70	15
Nails	1,4 x 40	55
Screws	6,0 x 140	60
Screws	4,0 x 40	75
Screws	4,0 x 50	650


Window Schedule				
Model	Type	Height	Width	Count
CW5R	Classic window 5 right	420	915	1
WCB6	Windows Crossbar 6	--	--	1




Laucher 40 (462x300)+VD


List of all items 1

Impregnated foundation beams




Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	4610
IFB2	IFB 70x40		2	2850
IFB4	IFB 70x40		4	4470

Floor Schedule





Mark	Type	Profile	Count	Length
FB	FB 17x114		40	2914

BB1	BB 20x40		2	4600
BB2	BB 20x40		4	3000

Roof

Mark	Type	Profile	Count	Length
RB	17x114		72	2672
RFB	Beam 40x143		4	4000
RFR	Ridge 40x143		1	4000

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2718
RF	Roof Fascia 18x120		4	2718
RR1	Roof reinforc ement 18x95		2	4000
RR2	Roof reinforc ement 38x38		2	4000

Laucher 40 (462x300)+VD

List of all items 2

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	16	3200
ALG-2	40X114	1	3416
ALG-3	40X114	1	3633
ATL-1	40X114	1	4000

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	715
1BL-2	40X57	1	1100
1LG-1 *	40X114	1	1013
1LG-2 *	40X114	1	2020
1LG-3 *	40X114	1	3028
1LG-4 *	40X114	1	4036
1LG-5 *	40X114	1	4820
1LG-6	40X114	1	4820
1LG-7	40X114	34	715
1LG-8	40X114	17	1100

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	4820
2LG-1 *	40X114	1	1013
2LG-2 *	40X114	1	2020
2LG-3 *	40X114	1	3028
2LG-4 *	40X114	1	4036
2LG-5 *	40X114	1	4820
2LG-6	40X114	18	4820

* Gable - delivered premounted



Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	22	3200
BTL-1	40X120	1	3200


Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40X114	7	1140
CLG-2	40X114	1	1356
CLG-3	40X114	1	3633
CLG-4	40X114	13	3200
CTL-1	40X114	1	4000

Log profiles	
Profile	Profile

40X114	
40X120	

Log profiles	
Profile	Profile

40X57	
40X114	